

**ASTM C 423 SOUND ABSORPTION
TEST REPORT**

Rendered to:

FABRI TRAK SYSTEMS, INC.

SERIES/MODEL: 1" FABRI TACK™

TYPE: Tackable Acoustic Core Material

Summary of Test Results								
Sample ID Number & Sample Description	1/3 Octave Sound Absorption Coefficients at the Octave Band Frequencies						NRC	SAA
	125	250	500	1000	2000	4000		
B6439.01A Series/Model 1" FABRI TACK™, Tackable Acoustic Core Material	0.16	0.40	0.82	0.96	0.92	0.90	0.75	0.77

Reference should be made to Architectural Testing, Inc. Report No. B6439.01-113-11 for complete test specimen description. The complete test results are listed in Appendix B.

ACOUSTICAL PERFORMANCE TEST REPORT

Rendered to:

FABRI TRAK SYSTEMS, INC.
111 West Park Drive
Mt. Laurel, New Jersey 08054

Report No: B6439.01-113-11
Test Date: 01/30/12
Report Date: 02/17/12
Record Retention End Date: 02/17/16

Test Sample Identification:

Series/Model: 1" FABRI TACK™

Type: Tackable Acoustic Core Material

Overall Size: 2.43 m by 2.74 m (8.00' by 9.00')

Project Summary: Architectural Testing, Inc. was contracted by FABRI TRAK Systems, Inc. to conduct a sound absorption test on a Series/Model 1" FABRI TACK™, tackable acoustic core material. A summary of the results is listed in the Test Results section, and the complete test data is included as Appendix B of this report. The sample was provided by the client.

Test Methods: The acoustical test was conducted in accordance with the following:

ASTM C 423-09a, *Standard Test Method for Sound Absorption and Sound Absorption Coefficients by the Reverberation Room Method.*

ASTM E 795-05, *Standard Practices for Mounting Test Specimens During Sound Absorption Tests.*

Test Equipment: The equipment used to conduct these tests meets the requirements of ASTM C 423. The microphone was calibrated before conducting the sound absorption test. The test equipment and test chamber descriptions are listed in Appendix A.

Test Procedure: The sound absorption of the reverberation chamber was measured before the test specimen was installed. This measurement shall be referred to as the empty room test. For the Type A mounting, the test specimen was placed directly against the test surface (floor) of the reverberation room with the FABRI TACK™ side facing up. A 1" height aluminum angle was used around the perimeter of the sample. The aluminum angle was then sealed to the sample and floor with duct tape. The sound absorption test was then re-run. The absorption measurement with the specimen inside the chamber shall be referred to as the full room test.

For the empty and full room tests, ten decay measurements were conducted at each of the five microphone positions. The sound absorption test was conducted at 1/3 octave band frequencies ranging from 80 to 5000 hertz. The air temperature and relative humidity conditions were monitored and recorded during the empty and full room measurements.

Sample Description:

Material Description	Average Thickness		Average Density		Average Weight	
FABRI TACK™ GLASS-STRATE	3.53 mm	0.14 inches	221.08 kg/m ³	13.80 pcf	0.78 kg/m ²	0.16 psf
FABRI TACK™ Fiberglass	21.72 mm	0.86 inches	107.81 kg/m ³	6.73 pcf	2.34 kg/m ²	0.48 psf

The test sample consisted of four, 1.22 m by 1.37 m (48" by 54") panels, which were arranged to produce a 2.43 m by 2.74 m (8.00' by 9.00') sample. The total weight of the sample was 21.71 kg (47.88 lbs). The sample test setup was photographed with a digital camera, and the pictures are included in Appendix C.

Comments: The client did not supply drawings on the Series/Model 1" FABRI TACK™, tackable acoustic core material. The specimen was disassembled, and the components will be retained by Architectural Testing for four years.

Test Results: A summary of the sound absorption tests is listed below:

Summary of Test Results								
Sample ID Number & Sample Description	1/3 Octave Sound Absorption Coefficients at the Octave Band Frequencies						NRC	SAA
	125	250	500	1000	2000	4000		
B6439.01A Series/Model 1" FABRI TACK™, Tackable Acoustic Core Material	0.16	0.40	0.82	0.96	0.92	0.90	0.75	0.77

The complete test results are listed in Appendix B. The acoustical chamber is qualified down to 80 hertz. Data provided below this frequency is for reference only.

Detailed drawings, data sheets, representative samples of test specimens, a copy of this report, or other pertinent project documentation will be retained by Architectural Testing for a period of four years from the original test date. At the end of this retention period, such materials shall be discarded without notice. Results obtained are tested values and were secured by using the designated test methods. This report does not constitute certification of this product nor an opinion or endorsement by this laboratory. It is the exclusive property of the client so named herein and relates only to the specimen tested. This report may not be reproduced, except in full, without the written approval of Architectural Testing.

For ARCHITECTURAL TESTING, INC:


Eric A. Thompson
Technician - Acoustical Testing

Todd D. Kister
Laboratory Supervisor - Acoustical Testing

ET:jmcs

Attachments (pages): This report is complete only when all attachments listed are included.

- Appendix-A: Equipment description (1)
- Appendix-B: Complete test results (2)
- Appendix-C: Photographs (1)

	<p>Architectural Testing, Inc. is accredited by the International Accreditation Service, Inc. (IAS) under the specific test methods listed under lab code TL-144, in accordance with the recognized International Standard ISO/IEC 17025:2005. The laboratory's accreditation or test report in no way constitutes or implies product certification, approval, or endorsement by IAS. This test report applies only to the specimen that was tested.</p>
---	--

Revision Log

<u>Rev. #</u>	<u>Date</u>	<u>Page(s)</u>	<u>Revision(s)</u>
0	02/17/12	N/A	Original Report Issue

Appendix A

Instrumentation:

Instrument	Manufacturer	Model	Description	ATI Number	Date of Calibration
Analyzer	Hewlett Packard	HP35670A	Real time analyzer	Y002929	06/14/11 *
Data Acquisition Unit	Agilent	34970A	Data Acquisition Unit	62211	07/13/11
Receive Room Microphone	GRAS	40 AR	1/2" Microphone	Y003246	08/22/11
Source Room Microphone	GRAS	40 AR	1/2" Microphone	Y003245	08/22/11
Receive Room Preamplifier	GRAS	26 AK	1/2" Preamplifier	Y003249	08/22/11
Source Room Preamplifier	GRAS	26 AK	1/2" Preamplifier	Y003248	08/22/11
Microphone Calibrator	Bruel & Kjaer	Type 4228	Pistonphone Calibrator	Y002816	02/17/11
Noise Source	Delta Electronics	SNG-1	Noise Generator	Y002181	N/A
Equalizer	Rane	RPE 228	Programmable Equalizer	Y002180	N/A
Power Amplifiers	Crown	Xti 2000	Two, Amplifiers	005769 005770	N/A
Receive Room Loudspeakers	Renkus-Heinz Inc.	Trap Jr./9	Two, Loudspeakers	Y001784 Y001785	N/A
Source Room Loudspeakers	Renkus-Heinz Inc.	Trap Jr./9	Two, Loudspeakers	Y002649 Y002650	N/A
Receive Room Environmental Indicator	Vaisala	HMW60Y	Temperature and Humidity Sensor	Y002653	03/01/11
Source Room Environmental Indicator	Vaisala	HMW60Y	Temperature and Humidity Sensor	005066	09/07/11
Weather Station	Davis Instruments	VantagePRO 6150C	Weather Station	Y003257	05/16/11

*- Note: The calibration frequency for this equipment is every two years per the manufacturer's recommendation.

Test Chamber:

	Volume	Description
Receive Room	234 m ³ (8291.3 ft ³)	Rotating vane and stationary diffusers Temperature and humidity controlled Isolation pads under the floor
Source Room	206.6 m ³ (7296.3 ft ³)	Stationary diffusers only Temperature and humidity controlled

	Maximum Size	Description
TL Test Opening	4.27 m (14 ft) wide by 3.05 m (10 ft) high	Vibration break between source and receive rooms

N/A-Non Applicable

Appendix B
Complete Test Results




SOUND ABSORPTION
ASTM C 423-09a

Architectural Testing

ATI No.	B6439.01A					
Client	Fabri Trak Systems, Inc.					
Specimen	1" FABRI TACK™, Tackable Acoustic Core Material					
Specimen Area	6.68 Square Meters			Mounting Type A		
Operator	Kurt Golden					
Date	Empty Room	Full Room		Barometric Pressure		
	1/30/12	1/30/12		1018.2 mb		
Temp C	21.7	21.9				
RH %	49.7	47.8				
Freq (Hz)	Empty Room Absorption (Square Meters)	Uncert	Full Room Absorption (Square Meters)	Uncert	Absorption Coefficient	Uncertainty
50	3.69	0.091	3.84	0.715	0.02	0.010
63	4.02	0.975	4.13	0.175	0.02	0.014
80	4.59	0.501	5.09	0.207	0.07	0.008
100	4.97	0.198	5.61	0.831	0.10	0.012
125	4.67	0.113	5.71	1.334	0.16	0.019
160	4.36	0.244	5.30	0.128	0.14	0.004
200	3.97	0.177	5.50	0.148	0.23	0.003
250	4.67	0.359	7.31	0.712	0.40	0.011
315	4.65	0.109	8.19	0.071	0.53	0.002
400	4.89	0.008	9.03	0.322	0.62	0.004
500	5.06	0.298	10.55	0.262	0.82	0.006
630	4.65	0.062	10.50	0.027	0.88	0.001
800	4.59	0.116	10.73	0.062	0.92	0.002
1000	4.79	0.114	11.20	0.028	0.96	0.002
1250	5.16	0.274	11.88	0.169	1.01	0.004
1600	4.95	0.026	11.44	0.193	0.97	0.003
2000	4.88	0.014	11.02	0.046	0.92	0.001
2500	5.08	0.084	11.40	0.197	0.95	0.003
3150	5.37	0.028	11.62	0.693	0.94	0.010
4000	5.42	0.218	11.42	0.259	0.90	0.005
5000	5.59	0.038	11.85	0.325	0.94	0.005
6300	5.24	0.192	11.48	0.219	0.93	0.004
8000	3.86	0.009	10.06	0.005	0.93	0.000
NRC Rating =	0.75					
SAA Rating =	0.77					



Note: The acoustical chambers are qualified for measurements down to 80 hertz.
Data reported below 80 hertz is for reference only.

 ACCREDITED	Architectural Testing, Inc. is accredited by the International Accreditation Service, Inc. (IAS) under the specific test methods listed under lab code TL-144, in accordance with the recognized International Standard ISO/IEC 17025:2005. The laboratory's accreditation or test report in no way constitutes or implies product certification, approval, or endorsement by IAS. This test report applies only to the specimen that was tested.
--	---



Architectural Testing

ATI No.	B6439.01A	Date	01/30/12
Client	Fabri Trak Systems, Inc.		
Specimen	1" FABRI TACK™, Tackable Acoustic Core Material		
Specimen Area	6.68 Square Meters	Mounting	Type A
Operator	Kurt Golden		

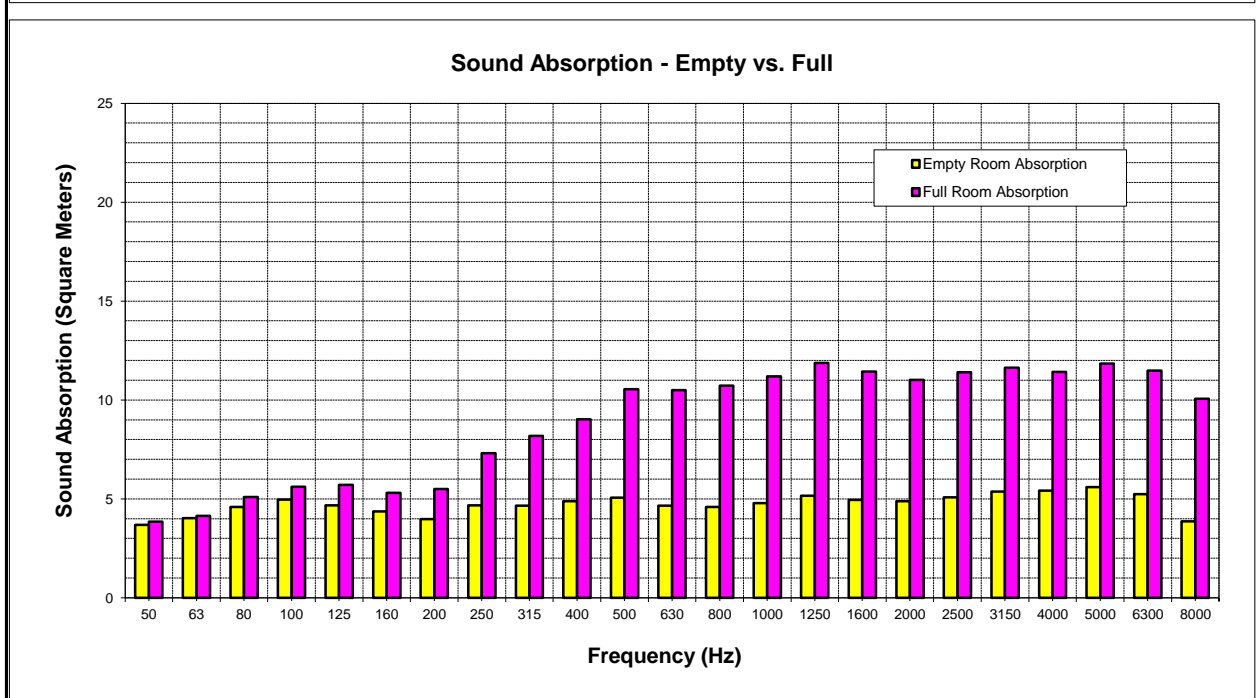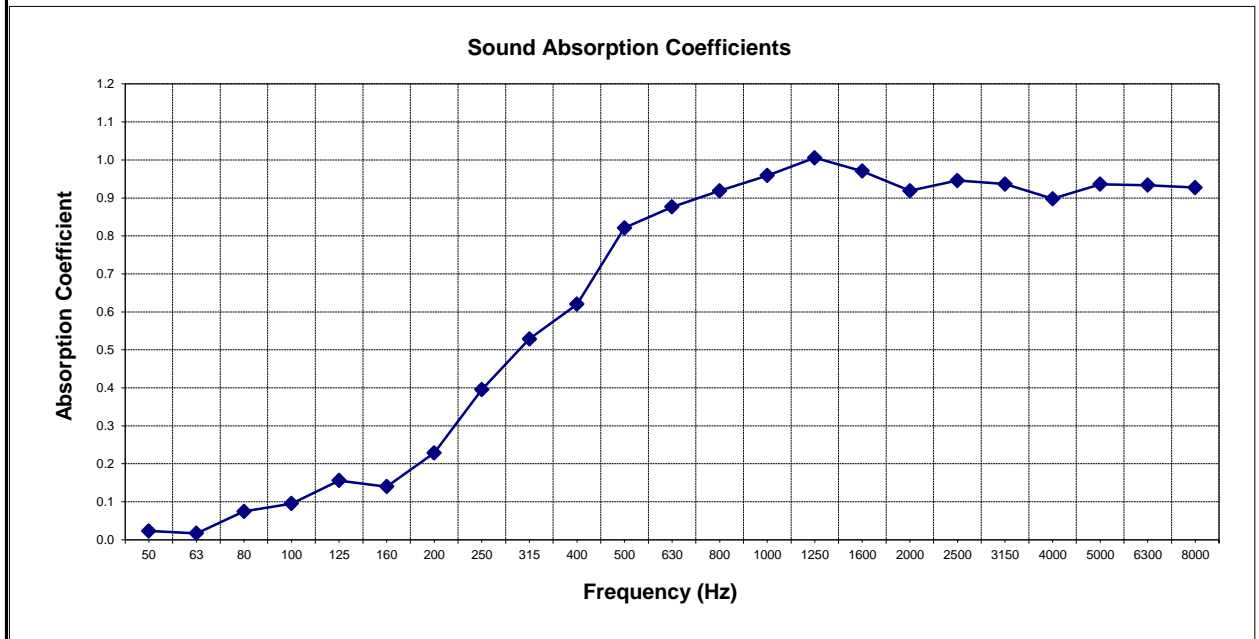

Architectural Testing, Inc. is accredited by the International Accreditation Service, Inc. (IAS) under the specific test methods listed under lab code TL-144, in accordance with the recognized International Standard ISO/IEC 17025:2005. The laboratory's accreditation or test report in no way constitutes or implies product certification, approval, or endorsement by IAS. This test report applies only to the specimen that was tested.

Appendix C

Photographs



Receive Room View of Installed Specimen



Cross Cut View of Installed Specimen